

ActivePure™

Protecting Indoor Air and Surfaces™



Features ActivePure® Technology proven to reduce viruses, bacteria, and other pathogens (full list of tested pathogens available below in “The Proof”)

THE TECHNOLOGY

The ActivePure® Guardian Cloud provides ActivePure in the form of a 2'x2' ceiling tile for situations when a portable unit cannot fit in the room. Patented ActivePure is an advanced surface and air purification technology. It has been proven to reduce over 99.9% of many common airborne and surface contaminants (list of tested pathogens can be found in “The Proof” section below).

ActivePure Technology does not replace the need to follow public health guidelines and should be used as complementary technology.

THE PROOF

In extensive unaffiliated lab testing, ActivePure® Technology has been proven to significantly reduce the following contaminants and pathogens:

- SARS-CoV-2
- *Staphylococcus aureus*
- *Aspergillus niger endospores*
- H1N1 Influenza
- H5N8 Influenza
- MRSA
- *Bacillus globigii*
- MS2 Bacteriophage
- *Staphylococcus epidermidis*
- PhiX-174
- *Erwinia herbicola*
- *Listeria monocytogenes*
- Murine Norovirus
- *E. coli*
- *Candida auris*
- *Botrytis cinerea*
- *Sclerotinia sclerotiorum*
- *Legionella pneumophila*
- *Aspergillus versicolor*
- *Clostridium difficile*
- *Salmonella enterica*


THE BENEFITS

The ActivePure Guardian Cloud provides surface decontamination and air purification 24/7. It is a proactive and effective solution for your home or business.

- Over a decade of testing, patented ActivePure® Technology has been proven to reduce over 99.9% of many common airborne and surface contaminants including viruses, bacteria, mold, fungi, VOC gases, smoke, allergens, and odors¹
- Provides 24/7 surface decontamination & air purification
- Discreet and easy installation



¹View test results at [ACTIVEPURE.COM/SCIENTIFIC-PROOF](https://activepure.com/scientific-proof)

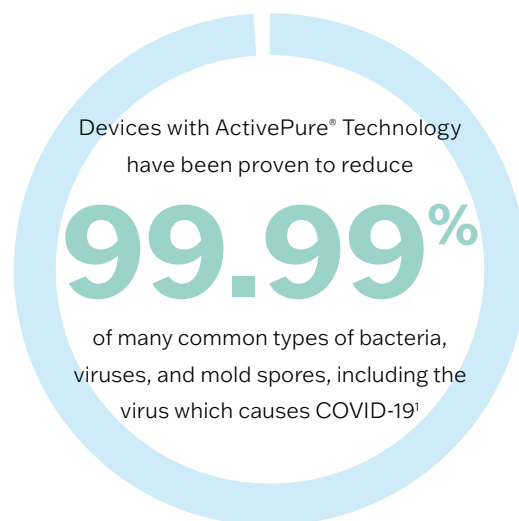

ActivePure®

GUARDIAN CLOUD

Product Information	00770 (120V) Model: A1021C (ozone free) Meets California ozone emissions limit. CARB Certified.
Technology Included	ActivePure® Technology – (1) 14" Cell
Electrical	110–120V 60Hz .75A (90W) 220V–240V 50Hz 0.3 Amp
Mechanical	100CFM (Fan) 2.83 m ³ /min, impedance protected motor, UV-C bulb, 26 watts, safety power switch
Safety	Conforms to UL 867
Operating Temperature	34° F – 200° F (1.1° C – 93° C)
Weight & Dimensions	12 lbs (5.44 kg) 24" H x 24" W x 5" D (60.96 cm H x 60.96 cm W x 12.7 cm D)
Recommended Maximum Coverage in a Contiguous Space¹	Up to 2,000 sq. ft. (185 m ²) depending on occupant density and other factors. High density commercial not to exceed 1,000 sq. ft. (92 m ²). For coverage in medical or health care environments, contact Medical@activepure.com .
Warranty	Limited 5 year warranty 1. Assumes an 8-foot ceiling. Solutions should be customized based upon a variety of factors including HVAC system capabilities, HVAC settings, air flows (taking into account walls, air pressure, and doors), ambient air temperature, humidity, variable density, known VOC concentrations, and other layers of protection.



Let us show you more!

ActivePure Technology is available in HVAC, In duct units and portable, plug-and-play units.



ACTIVEPURE.COM